












KONDO-TEC



Fill your needs with us

RIGGING HARDWARE CATALOG



KT-C CHAIN BLOCK


“KONDO” CHAIN BLOCK MODEL: KT-C


 KT-C Chain Block
(Single Chain)

 KT-C Chain Block
(Double Chain)


 ▲ “KONDO”
embossed mark

 ▲ “KONDO” brand
plate on product


SPECIFICATION										
Rated Load (T)	0.5	1	1.5	2	3	5	10	15	20	30
Test Load (T)	0.75	1.5	2.25	3	4.5	7.5	12.5	18.75	25	37.5
Standard Lift (m)	2.5	2.5	2.5	2.5	3	3	3	3	3	3
Efforts required at capacity (N)	262	324	395	330	402	430	438	447	438	442
Diameter of Load Chain (mm)	5	6	7.1	6(8)	7.1	10	10	10	10	10
No. of Load Chain	1	1	1	2(1)	2	2	4	6	8	10
Dimensions (mm)	A	127	156	180	156	180	230	410	410	645
	B	115	131	142	131	142	171	171	204	215
	C	288	334	415	459	536	660	738	1028	1002
	D	23	24	36	34	35	47	61	81.6	81.6
Net Weight (kg)	7	10.5	15.5	16	23	39	69	95	155	237
Extra weight per meter of extra lift (kg)	1.5	1.8	2	2.7	3.2	5.3	9.8	14.2	19.6	23.9

KT-L LEVER BLOCK


“KONDO” LEVER BLOCK MODEL: KT-L




▲ 360° Rotation

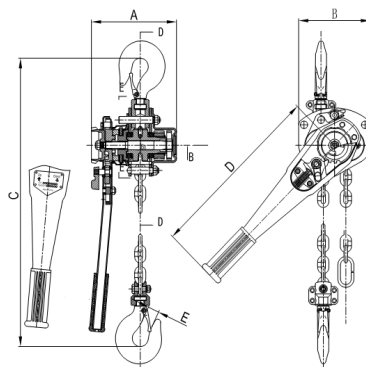


SPECIFICATION										
Rated Load (T)	0.25	0.5	0.75	1	1.5	2	3	6	9	
Test Load (T)	0.375	0.75	1.125	1.5	2.25	3	4.5	9	13.5	
Standard Lift (m)	1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	
Min. distance between two hooks (mm)	205	260	295	295	335	385	450	615	720	
Efforts required at Capacity (N)	217	303	140	185	234	251	363	370	375	
Diameter of Load Chain (mm)	4	5	6	6	7.1	8	10	10	10	
No. of Load Chain	1	1	1	1	1	1	1	2	3	
Dimensions (mm)	A	92	110	152	152	175	175	195	195	195
	B	75	82	128	128	148	160	181	232	366
	C	205	260	295	295	335	385	450	615	720
	D	153	261	256	256	368	368	368	368	368
	E	17	23	24	24	36	34	35	47	61
Net Weight (kg)	1.85	4.6	7.7	8	10.6	14.8	20	28	46	

■ SLR-013 G80 EUROPEAN TYPE EYE SLING HOOK WITH LATCH



SIZE	WEIGHT (kgs)	WLL (t)	B.L/T	Φ1	E	D	Φ	L1	L2
6MM	0.24	1.12	4.48	9	24	21	20	75	108
7-8MM	0.4	2	8	11	30	26	25	98.5	133
10MM	0.9	3.15	12.6	15	34	39	38	120	167
13MM	1.83	5.3	21.2	19	39	54	43	152	213
16MM	3.2	8	32	23	46	64	50	183.5	255
20MM	5.8	12.5	50	24	48	80	62	219	305
22MM	9.2	15	60	32	71	80	62	241	348
26MM	13	21.2	84.8	35	81	82	64	279	394
32MM	17	31.5	126	37	102	112	88	355	480

■ SLR-032 G80 EUROPEAN TYPE MASTER LINK ASSEMBLY


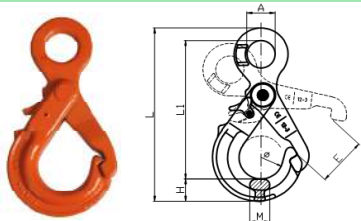
SIZE	WEIGHT (kgs)	WLL (t)	A	B	D	a	b	d	SxH
6MM	1.18	2.36	135	75	18	54	25	13	7x25
7MM	1.24	3.15	135	75	18	60	38	13	7x25
8MM	2.2	4.25	160	90	22	70	34	16	8x28
10MM	3.4	6.7	180	100	26	85	40	18	11x35
13MM	6.1	11.2	200	110	32	115	50	22	13x43
16MM	9.98	17	260	140	36	140	65	26	17x55
18MM	18.9	21.2	340	180	45	180	100	32	18x59
20MM	22.6	26.5	350	190	50	180	100	32	20x64
22MM	25.2	31.5	350	190	50	180	100	36	-
26MM	35.2	45	400	200	56	180	100	40	-
28MM	47	50	430	220	63	180	100	45	-
32MM	66.46	63	460	250	72	200	110	50	-

■ SLR-033 G80 EUROPEAN TYPE MASTER LINK


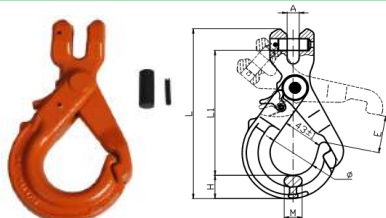
SIZE	WEIGHT (kgs)	WLL (t)	A	B	D	S x H
7-6MM	0.34	1.6	110	60	13	7 x 25
8-7MM	0.54	2.12	110	60	16	7 x 25
10-8MM	0.823	3.15	135	75	18	8 x 28
13-10MM	1.5	5.3	160	90	22	11 x 35
16-13MM	2.32	8	180	100	26	13 x 43
18-16MM	3.95	11.2	200	110	32	17 x 55
20-18MM	6.34	14	260	140	36	19 x 60
22-20MM	8.96	17	300	160	40	20 x 64
26-22MM	12.8	21.2	340	180	45	-
32-26MM	16.55	31.5	350	190	50	-
36-32MM	23.28	45	400	200	56	-
40-36MM	32	56	430	220	63	-

■ SLR-074 G80 EUROPEAN TYPE CONNECTING LINK


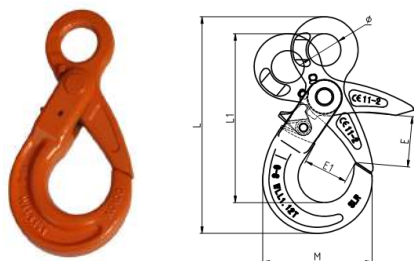
SIZE	WEIGHT (kgs)	WLL (t)	B.L/T	A	B	L	K	H
6MM	0.08	1.12	4.48	15	7.5	58	42	7
7-8MM	0.146	2	8	18	9.5	79.5	60.5	8.5
10MM	0.3	3.15	12.6	25	12	90.5	68	11.5
13MM	0.63	5.3	21.2	29	15	117	87	15
16MM	1.15	8	32	34.5	19.8	148	108.4	19.8
18-20MM	2.1	12.5	50	41	24	169.5	121.5	24
22MM	3	15	60	48	26	193.5	141.5	26
26MM	4.5	21.2	84.8	57.5	31	220	158	30
32MM	8.21	31.5	126	67	38	281	205	37

■ SLR-077 G80 EUROPEAN TYPE EYE SELF-LOCKING HOOK WITH GRIP


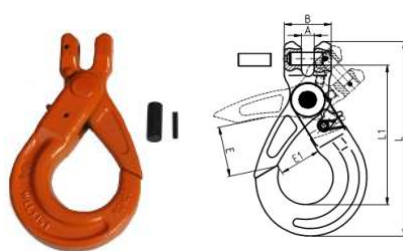
SIZE	WEIGHT (kgs)	WLL (t)	B.L/T	A	H	E	L	Φ	M	L1
7-8MM	0.75	2	8	25	22	34	164	40	18	131
10MM	1.3	3.15	12.6	32	26	42	201	50	22.5	161.6
13MM	1.93	5.3	21.2	40	31	50	243.5	60	29	195.5
16MM	3.4	8	32	50	39.5	60	298	70	35	238

■ SLR-078 G80 EUROPEAN TYPE CLEVIS SELF-LOCKING HOOK WITH GRIP


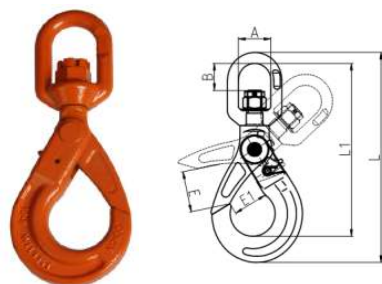
SIZE	WEIGHT (kgs)	WLL (t)	B.L/T	A	H	E	L	Φ	M	L1
7-8MM	0.8	2	8	9.5	21.5	36	150	40	18	111
10MM	1.5	3.15	12.6	12	26.2	44	189	50	22.5	139
13MM	2.8	5.3	21.2	15	31	54	229	60	29	168
16MM	5.1	8	32	18.5	39.5	63	299	72	35	238

■ SLR-737 G80 EUROPEAN TYPE EYE SELF-LOCKING HOOK


SIZE	WEIGHT (kgs)	WLL (t)	B.L/T	Φ	E	E1	L1	L
6MM	0.5	1.12	4.48	21	35	28	110	141
7-8MM	0.88	2	8	25	40	35	136	175
10MM	1.58	3.15	12.6	34.5	50	45	168	214
13MM	3	5.3	21.2	40	60	52.5	207	268
16MM	5.9	8	32	50	65	63.3	254	332
18-20MM	7	12.5	50	64.5	80	86	274.5	332
22MM	12.3	15	60	70	83	76	319	415
26MM	20	21.2	84.8	80	106	96	362	472
32MM	44	31.5	126	105	140	133	470	614

■ SLR-738 G80 EUROPEAN TYPE CLEVIS SELF-LOCKING HOOK


SIZE	WEIGHT (kgs)	WLL (t)	B.L/T	A	B	E	E1	L1	L
6MM	0.44	1.12	4.48	8	32	35	28	96	131
7-8MM	0.8	2	8	9.5	38.5	40	35.8	119.3	161.8
10MM	1.38	3.15	12.6	12.5	46	50	45	142	195
13MM	2.81	5.3	21.2	15	59	60	52.5	179	249
16MM	6	8	32	18.5	77	65	63.3	224.8	310
18-20MM	7.25	12.5	50	25	77	80	86	238.3	335
22MM	12.8	15	60	25	97.5	83	76	277	392
26MM	21.8	21.2	84.8	30	118	106	96	312	450
32MM	49.6	31.5	126	35	150	140	135	416	589.6

■ SLR-755 G80 EUROPEAN TYPE SWIVEL SELF-LOCKING HOOK


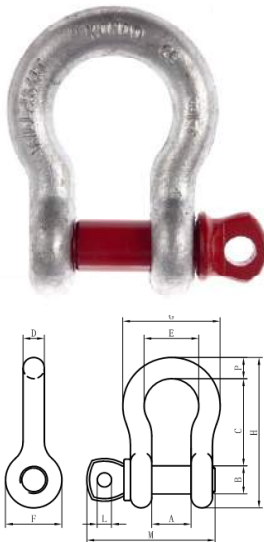
SIZE	WEIGHT (kgs)	WLL (t)	B.L/T	A	B	E	E1	L1	L
6MM	0.71	1.12	4.48	32.5	24	35	28	152.5	184
7-8MM	1.15	2	8	36	29.5	40	35.8	189	228
10MM	1.86	3.15	12.6	42	35	50	48	224	270
13MM	3.51	5.3	21.2	50	41	60	52.5	267	324
16MM	7.33	8	32	61	56.8	65	63.3	355.6	406
18-20MM	10.3	12.5	50	72	63	80	86	378.2	460.5
22MM	17.5	15	60	97	98	83	76	466	564
26MM	23	21.2	84.8	123	115	106	96	544	661
32MM	81	31.5	126	140	146	140	135	679	829

"KONDO" US TYPE SHACKLE

- "KONDO" US Shackles are complying with US Federal Specification
- "KONDO" mark, WLL, CE Mark, and Size will be marked on products
- Hot Dip Galvanized (or Un-Galvanized)




■ U.S.TYPE SCREW PIN ANCHOR SHACKLE




SIZE (in.)	WLL (metric ton)	WEIGHT EACH (lbs.)	DIMENSIONS (in.)										
			A	B	C	D	E	F	G	H	L	M	P
1/2	2	0.72	0.81	0.64	1.87	0.50	1.31	1.19	2.31	3.28	0.31	2.87	0.50
5/8	3-1/4	1.37	1.06	0.75	2.38	0.63	1.69	1.56	2.93	4.16	0.45	3.54	0.63
3/4	4-3/4	2.35	1.26	0.87	2.81	0.75	2.00	1.81	3.50	4.97	0.51	4.17	0.81
7/8	6-1/2	3.62	1.44	0.99	3.32	0.87	2.28	2.09	4.03	5.83	0.51	4.65	0.97
1	8-1/2	5.03	1.69	1.10	3.76	1.00	2.69	2.38	4.69	6.56	0.57	5.29	1.06
1-1/8	9-1/2	7.41	1.81	1.25	4.25	1.16	2.91	2.69	5.16	7.47	0.64	6.00	1.25
1-1/4	12	9.50	2.04	1.37	4.69	1.29	3.25	3.00	5.75	8.25	0.70	6.69	1.38
1-3/8	13-1/2	13.53	2.25	1.50	5.26	1.42	3.63	3.31	6.38	9.16	0.76	7.41	1.50
1-1/2	17	17.20	2.38	1.65	5.74	1.54	3.88	3.63	6.88	10.00	0.82	7.97	1.62
1-3/4	25	27.78	2.88	2.01	7.00	1.75	5.00	4.17	8.86	12.35	0.87	9.29	2.25
2	35	45.00	3.25	2.24	7.78	2.01	5.75	4.76	9.97	13.69	0.94	10.57	2.40
2-1/2	55	85.75	4.13	2.76	10.51	2.48	7.24	5.98	12.20	17.36	1.39	13.43	2.48

■ U.S.TYPE SAFETY PIN ANCHOR SHACKLE

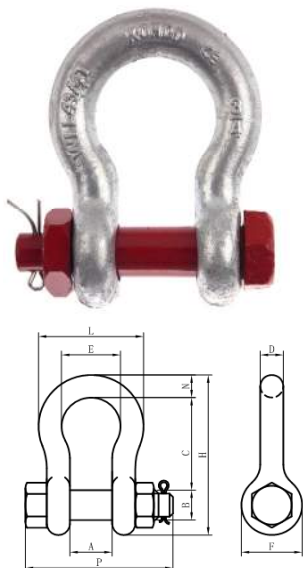



SIZE (in.)	WLL (metric ton)	WEIGHT EACH (lbs.)	DIMENSIONS (in.)									
			A	B	C	D	E	F	H	L	N	P
1/2	2	0.79	0.81	0.63	1.87	0.50	1.31	1.19	3.28	2.31	0.50	3.07
5/8	3-1/4	1.68	1.06	0.79	2.36	0.63	1.69	1.56	4.16	2.93	0.63	3.74
3/4	4-3/4	2.72	1.26	0.87	2.82	0.75	2.00	1.81	4.97	3.50	0.81	4.25
7/8	6-1/2	3.95	1.44	0.98	3.32	0.87	2.28	2.09	5.83	4.03	0.97	4.96
1	8-1/2	5.66	1.69	1.10	3.76	1.00	2.69	2.38	6.56	4.69	1.06	5.55
1-1/8	9-1/2	8.27	1.81	1.26	4.25	1.16	2.91	2.69	7.47	5.16	1.25	5.98
1-1/4	12	11.71	2.04	1.38	4.69	1.29	3.25	3.00	8.25	5.75	1.38	6.61
1-3/8	13-1/2	15.83	2.25	1.50	5.26	1.42	3.63	3.31	9.16	6.38	1.50	7.22
1-1/2	17	20.80	2.38	1.65	5.74	1.54	3.88	3.63	10.00	6.88	1.62	7.76
1-3/4	25	33.91	2.88	2.00	7.01	1.75	5.00	4.17	12.35	8.86	2.25	9.09
2	35	52.25	3.25	2.24	7.78	2.01	5.75	4.76	13.69	9.97	2.40	10.35
2-1/2	55	98.25	4.13	2.76	10.51	2.48	7.24	5.98	17.36	12.20	2.48	14.33

■ KT-GT SERIES GEARED TROLLEY (GCL610)


MODEL	RATED LOAD (T)	TEST LOAD (T)	DIMENSIONS (mm)				I-BEAM RECOMMENDED	NET WEIGHT (kg)
			A	B	C	H		
0.5	0.5	0.75	271	172	190	108.5	75-125	9
1	1	1.5	271	206	222	122	75-125	12.6
1.5	1.5	2.25	308	231	238.5	130	100-150	15.9
2	2	3	308	240	267	132.5	100-150	17
3	3	4.5	342	279	319	181	100-150	25
5	5	7.5	384	318	384	219	125-175	50
10	10	15	442	380	490	275	125-180	100

■ KT-PT SERIES PLAIN TROLLEY (GCT610)


MODEL	RATED LOAD (T)	TEST LOAD (T)	DIMENSIONS (mm)				I-BEAM RECOMMENDED	NET WEIGHT (kg)
			A	B	C	H		
0.5	0.5	0.75	208	172	190	108.5	75-125	3.3
1	1	1.5	220	206	222	122	75-125	7.9
1.5	1.5	2.25	260	231	238.5	130	100-150	12
2	2	3	260	240	267	132.5	100-150	13.2
3	3	4.5	285	279	319	181	100-150	23
5	5	7.5	338	318	384	219	125-175	44
10	10	15	362	380	490	275	125-180	88

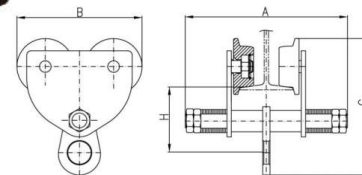
■ KT-G TYPE GEARED TROLLEY (TG) / with ANTI-COLLISION


MODEL	RATED LOAD (T)	TEST LOAD (T)	CHAIN PULL TO LIFT FULL LOAD (N)	DIMENSIONS (mm)				I-BEAM RECOMMENDED	NET WEIGHT (kg)
				A	B	C	H		
0.5	0.5	0.75	60	248	196	190	108	68-126	9
1	1	1.5	80	280	236	211	115	80-146	14
2	2	3	140	318	273	236	130	80-168	16
3	3	4.5	150	340	320	295	164	88-168	27
5	5	7.5	170	365	366	334	177	100-170	50
10	10	15	320	410	389	460	237	122-203	93
20	20	30	340	475	798	575	300	122-203	215
30	30	37.5	352	392	625	551	260	150-180	230

■ KT-P TYPE PLAIN TROLLEY (TP) / with ANTI-COLLISION

MODEL	RATED LOAD (T)	TEST LOAD (T)	DIMENSIONS (mm)				I-BEAM RECOMMENDED	NET WEIGHT (kg)
			A	B	C	H		
0.5	0.5	0.75	208	196	190	108	68-126	5.5
1	1	1.5	242	236	211	115	80-146	9.5
2	2	3	280	273	236	130	80-168	13.5
3	3	4.5	300	320	295	164	88-168	25
5	5	7.5	316	366	334	177	100-170	44
10	10	15	343	389	460	237	122-203	90



Fill your needs with us



KONDOTEC

International Department
2-90 Sakaigawa 2-chome
Nishi-ku Osaka Japan 550-0024

Kondotec Intl.(Thailand) Co., Ltd.
38 Q.House Convent Bldg. 7th Fl Unit 7 BCD
Convent Rd. Silom Bangrak
Bangkok Thailand 10520

TEL: +81 6 6582 9672
FAX: +81 6 6582 9674
E-mail: international@kondotec.co.jp

www.kondotec.co.jp